

PM-4

- 4 1/2 Display (19999)
- Measuring DCV, DCA, ACV, ACA
- Din Size 96 × 48mm




SPECIFICATION

DISPLAY	RED LED(14.2mm H)
DISPLAY ACCURACY	±0.2%
MEASURING ACCURACY	±0.5% F.S ±2 Digit
DISPLAY RANGE	0~19999
POLARITY DISPLAY	Only "-" Display
DIELECTRIC STRENGTH	2000VAC/1Min (Input/Power/Case)
CONSUMED POWER	AC3.5VA, DC3W
AMBIENT TEMPERATURE	-10°C~+55°C
AMBIENT HUMIDITY	45~85% RH
WEIGHT	Approx. 330g


RANGE	INPUT IMPEDANCE	INPUT PROTECTION
0~199.99mV	≥10MΩ	100V
0~1.9999V	≥10MΩ	250V
0~19.999V	≥1MΩ	500V
0~199.99V	≥1MΩ	750V
0~600V	≥1MΩ	750V
0~1.9999mA	≤100Ω	300mA
0~19.999mA	≤10Ω	500mA
0~199.99mA	≤1Ω	1A
0~1.9999A	≤0.1Ω	5A
0~10.000A	≤0.01Ω	15A

ORDERING INFORMATION

PM-4 D V 3 A



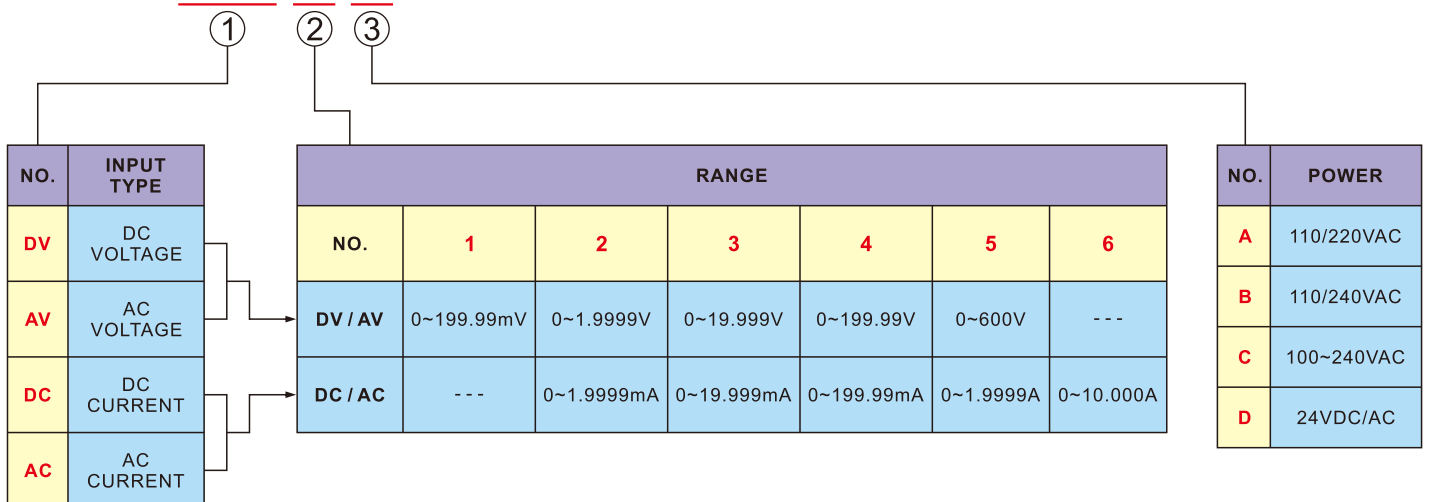


CONNECTION DIAGRAMS

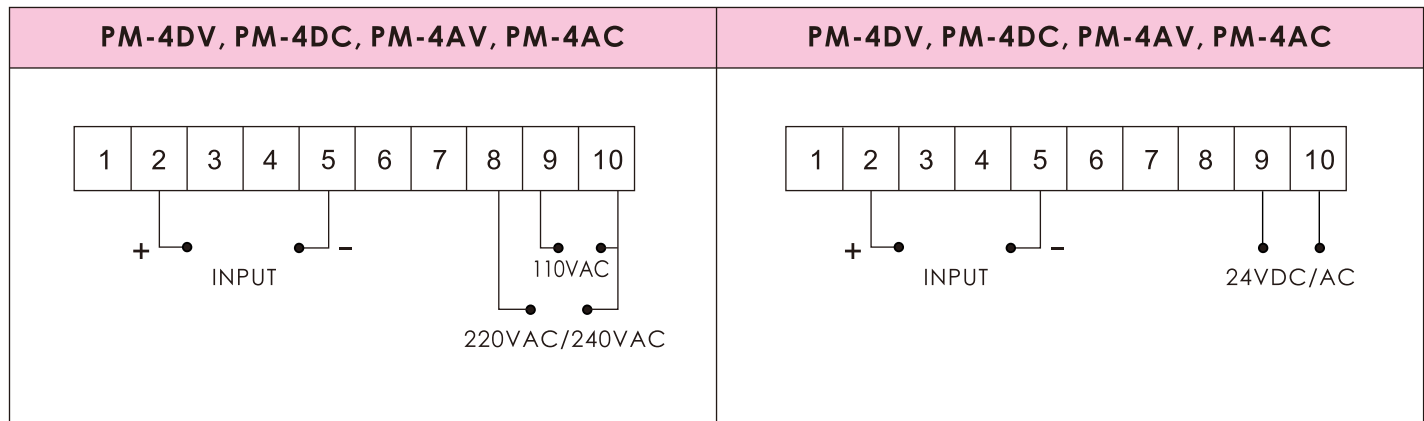

DIMENSIONS & MOUNTING HOLE

Units: mm

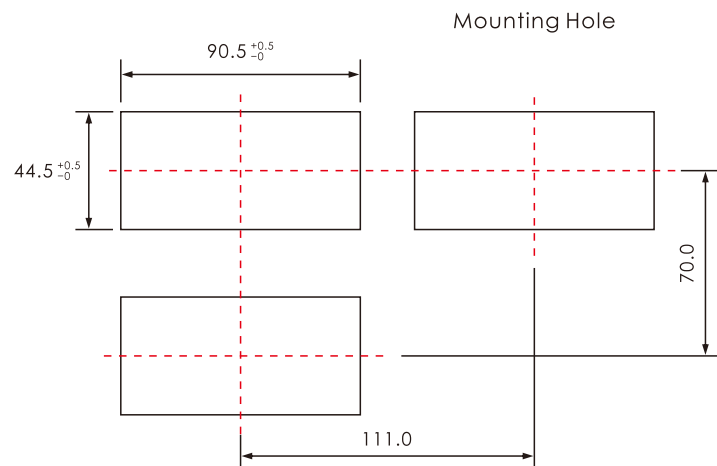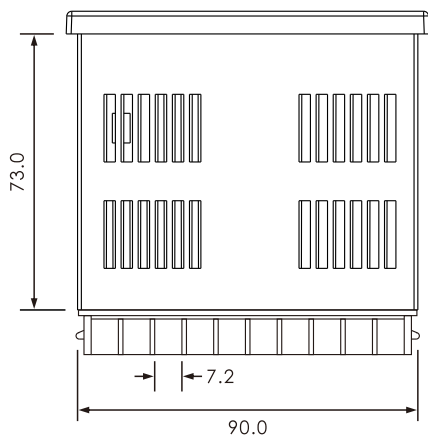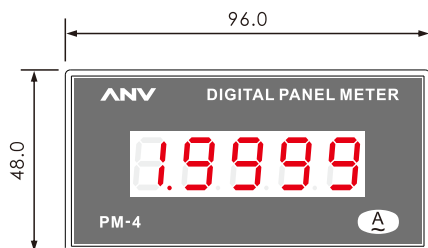

ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
 Tel :+886 7 359 5833 Fax :+886 7 359 5822
 E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
 New Taipei City, Taiwan
 Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
 E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
 Tel :+886 6 216 0988 Fax :+886 6 216 0388
 E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
 Shatin, N.T., Hong Kong
 Tel :+852 2690 2588 Fax :+852 2690 2511
 E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
 Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
 E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
 Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
 Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
 E-Mail : anv@anv.com.my