


LS-5 Limit Switches

Feature

- Double-circuit type of limit switch, is widely used
- With strong aluminum cast outer shell
- High mechanical strength
- Structure preventing oil, water and pressure
- Indicating plate with setting position is installed in it, so it is easy to maintain
- Various of actuators is taken convenience for using
- Built-in contact stand has double-spring, so it has long mechanical life

Contact Form



Rating

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	10	3	1.5	10	5	2.0		
250VAC	5	2	1	5	3	1.0		
480VAC	3	1.5	0.8	3	1.5	0.8		
600VAC	1	1	0.5	1.5	1	0.5		
8VDC	10	6	3	10	6			
14VDC	10	6	3	10	6			
30VDC	6	4	3	6	4			
125VDC	0.8	0.2	0.2	0.8	0.2			
250VDC	0.4	0.1	0.1	0.4	0.1			

NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec.max.(DC).
 2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.

Characteristic


Operation speed	1mm-2m/s
Operating frequency	Mechanical: 120 operations/minute Electrical: 30 operations/minute
Contact resistance	15mΩ max. (initial value)
Insulation resistance	100mΩ min. (at 500VDC)
Dielectric strength	1000VAC, 50/60 Hz for 1 minute between terminals of the same polarity
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100G'S) Malfunction: 300m/Sec ² (about 30G'S)
Ambient temperature	-10~+80℃
Ambient humidity	<95% RH
Life	Mechanical: 15,000,000 operations above (under rated OT) Electrical: 500,000 operations above
Weight	About 275g
Degree of protection	IEC specification: IP66

Operating Characteristic


Models	LS-5104	LS-5102	LS-5106	LS-5169	LS-5108	LS-5107	LS-5105	LS-5101	LS-5166	LS-5168	LS-5103	LS-5109
OF(Max.)	1360g	2720g	150g	29g	1360g	142g	1200g	2720g	120g	80g	2720g	2720g
RF(Min.)	227g	910g	-	-	227g	28g	-	910g	-	-	910g	910g
PT(Max.)	20°	1.7mm	28mm	28mm	20°	20°	55°	1.7mm	28mm	28mm	1.7mm	1.7mm
OT(Min.)	30°	5.6mm	-	-	30°	30°	35°	6.4mm	-	-	5.6mm	5.6mm
MD(Max.)	12°	1mm	-	-	12°	12°	-	1mm	-	-	1mm	1mm
TF(Max.)	2720g	-	-	-	2720g	200g	-	-	-	-	2720g	2720g
TT(Min.)	50°	6.5±0.8mm	-	-	50°	50°	OP:90±10°	OP:34±2.8mm	-	-	6.5±0.8mm	9±0.8mm

Appearance and Dimension


LS-5104

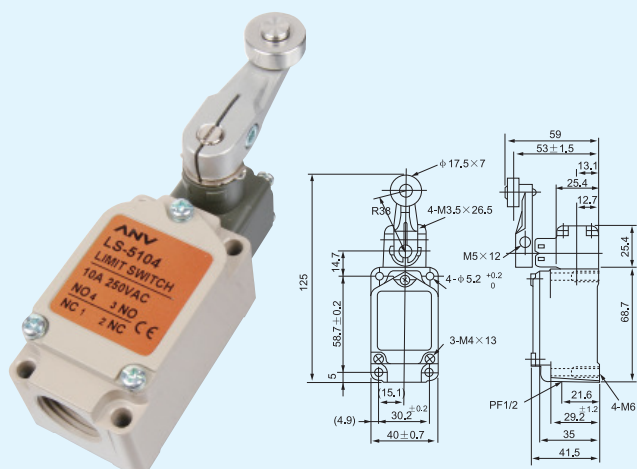


LS-5108

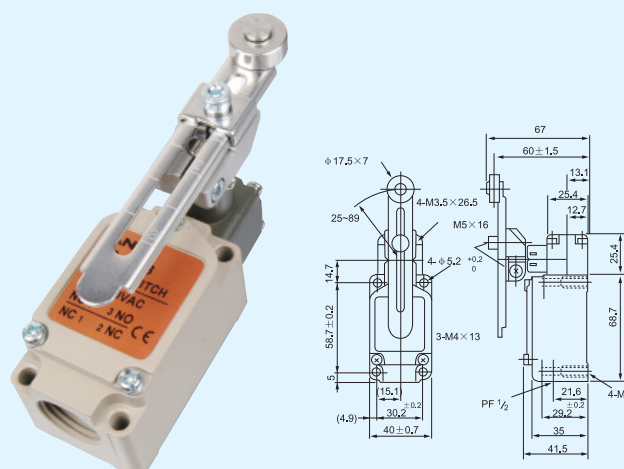


LS-5105

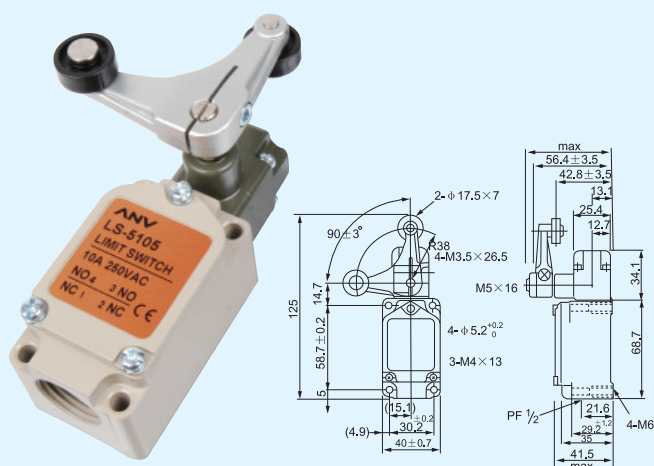


LS-5107

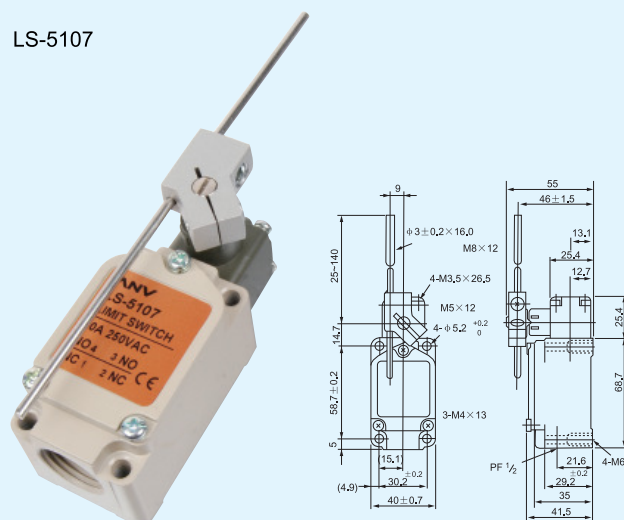


LS-5101

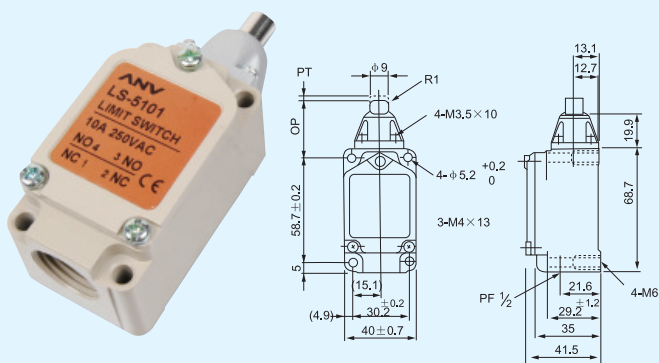


LS-5103

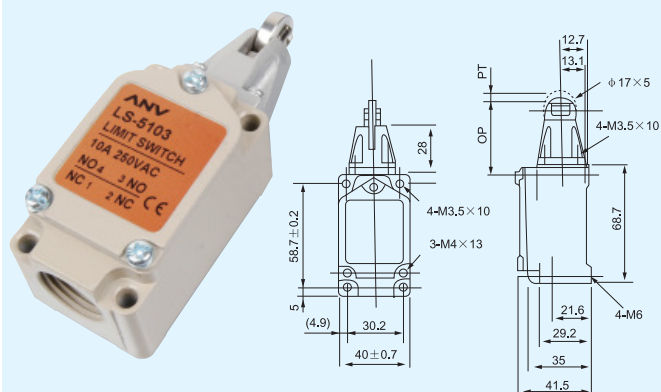


LS-5102

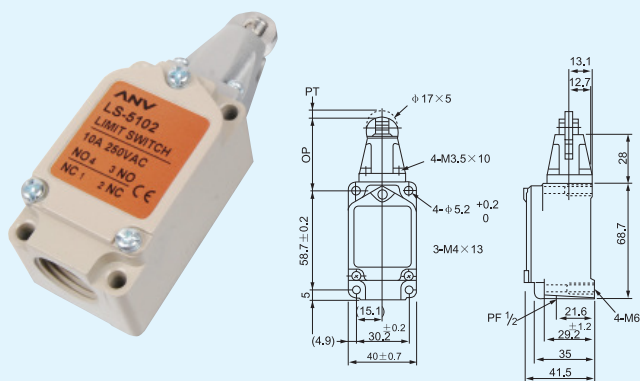


LS-5109

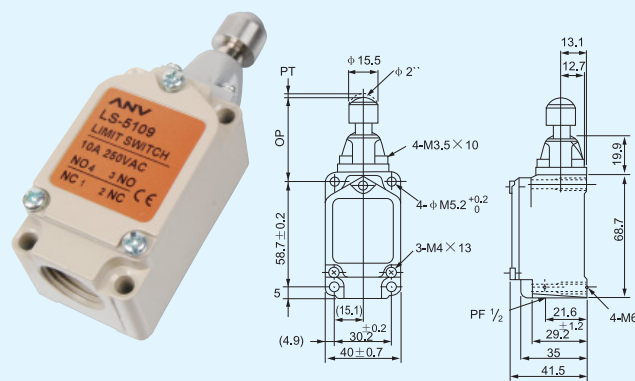


LS-5106

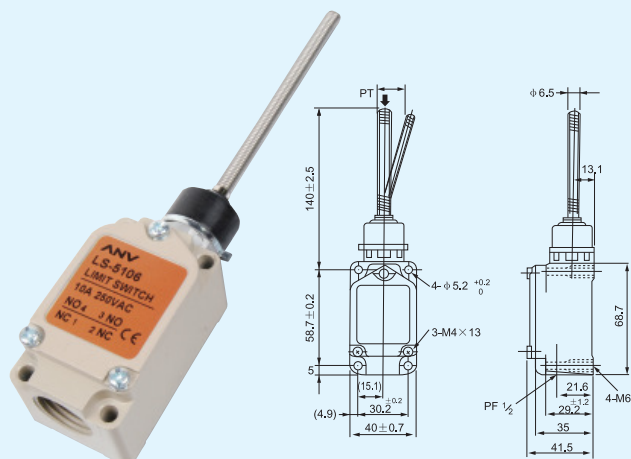

LS-5168

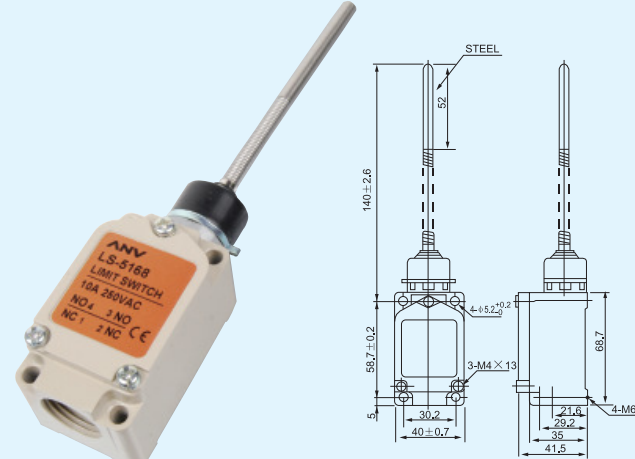

LS-5166

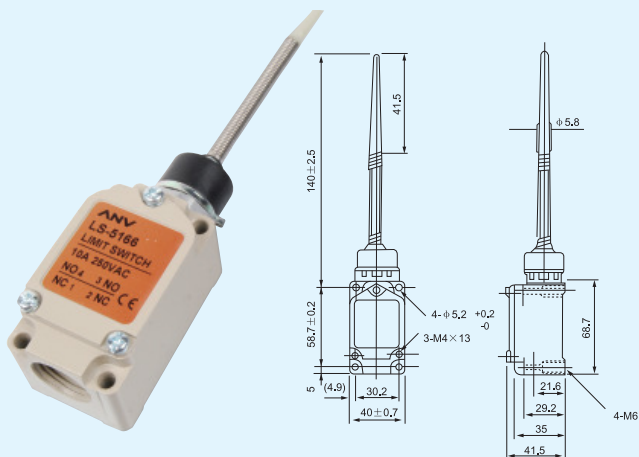

LS-5169

