




- Use for auto detecting phase reversal
- Adjustable setting from 0 to $\pm 29\%$ of rated voltage
- Can detect voltage over or under of setting voltage
- Over voltage delay time 0.1sec~10sec adjustable
- Under voltage delay time 0.1sec~10sec adjustable

SPECIFICATIONS


MODEL		AVM-NA, YA	AVM-N1A, Y1A	AVM-NB, YB	AVM-N1B, Y1B
		3-phase 3-wire	1-phase 2-wire	3-phase 3-wire	1-phase 2-wire
RATED VOLTAGE		AC(V): 220, 240, 380, 415, 440, 480 50/60Hz			
DETECTING METHOD		Detect 3-phase voltage	Detect 1-phase voltage	Detect 3-phase voltage	Detect 1-phase voltage
SETTING VOLTAGE RANGE		0~ $\pm 29\%$ of rated voltage			
OUTPUT CONTACT		1C 5A 250VAC Resistive Load			
LIFE	MECHANICAL	10^5 times			
	ELECTRICAL	5×10^6 times			
RESET TIME		0.1 sec max			
CONSUMED POWER		2VA			
AMBIENT TEMPERATURE		$-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$			
AMBIENT HUMIDITY		45~85%RH			
WEIGHT		Approx. 210g			

CONNECTION DIAGRAMS & TIMING CHARTS

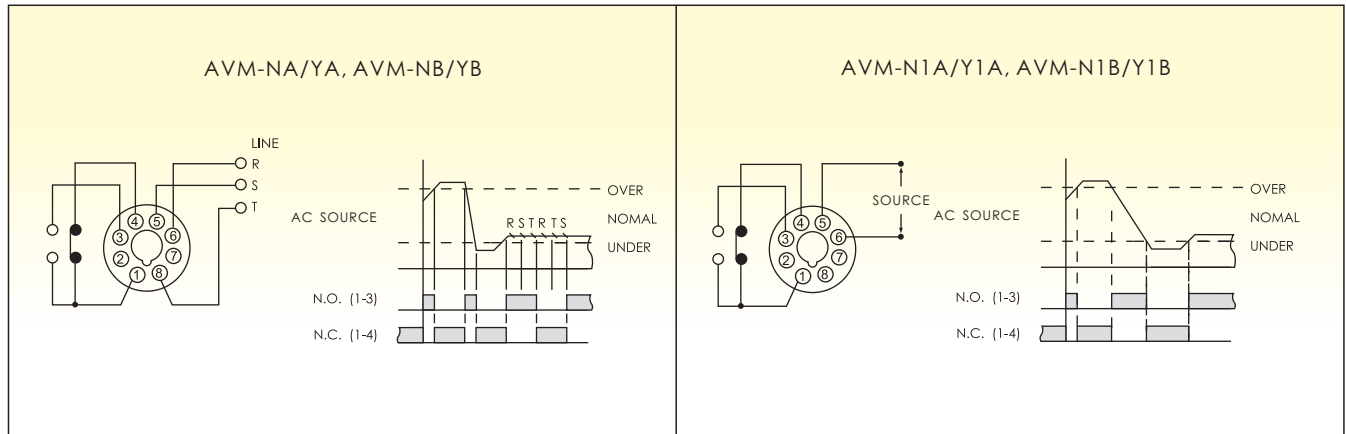


DIMENSIONS

Surface Mounting (N Type) : Using 8PFA Socket

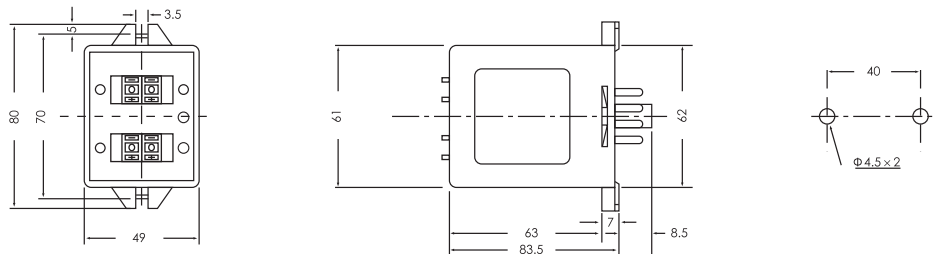

Flush Mounting (Y Type) : Using US-08 or P3G-08,P3G-08E Socket

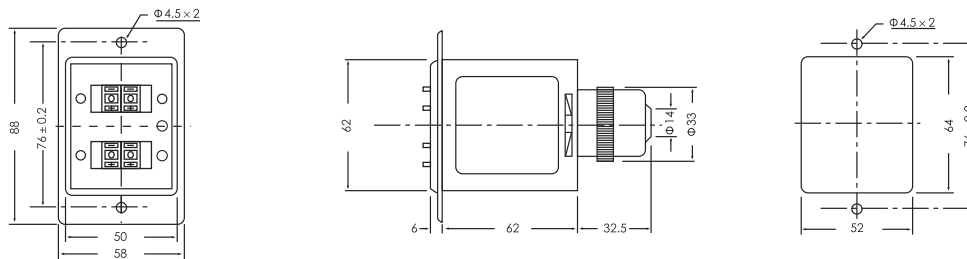

ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
Tel :+886 7 359 5833 Fax :+886 7 359 5822
E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
New Taipei City, Taiwan
Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
Tel:+886 6 216 0988 Fax:+886 6 216 0388
E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
Shatin, N.T., Hong Kong
Tel :+852 2690 2588 Fax :+852 2690 2511
E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
E-Mail : anv@anv.com.my