


MMS Micro Switches

Outer Drawing

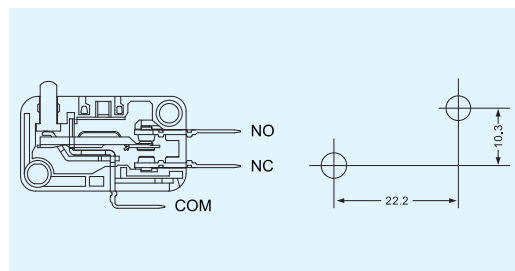


- High contact reliability
- High durability with a bounce time of 1 ms max
- Degree of protection IP40

Performance


Contact resistance	15mΩ max. (initial)
Insulation resistance	100mΩ min. (at 500VDC)
Dielectric strength	1,000 VAC 50/60 Hz for 1 minute
Life	Mechanical:10,000,000 operations min. Electrical:100,000 operations min.(full load)

Appearance and Dimension


MMS100

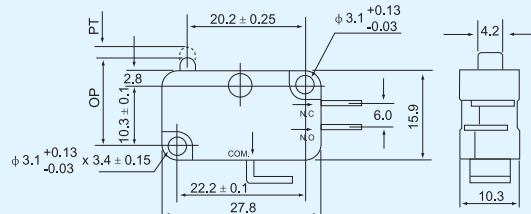


MMS101

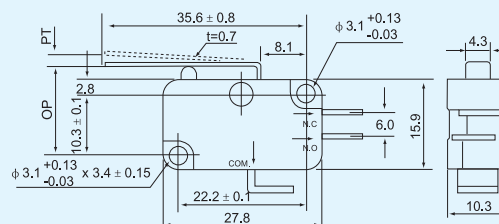



MMS102

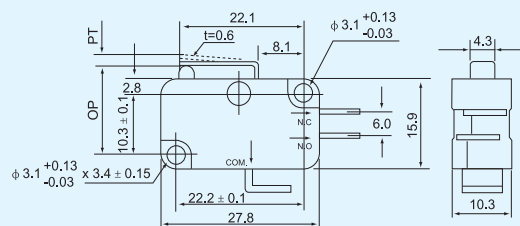



MMS103

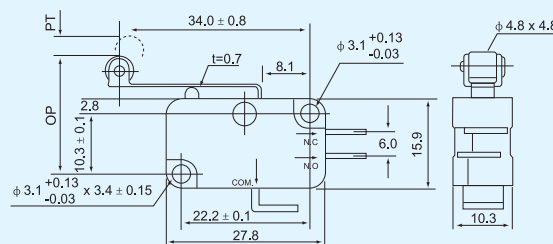


MMS104

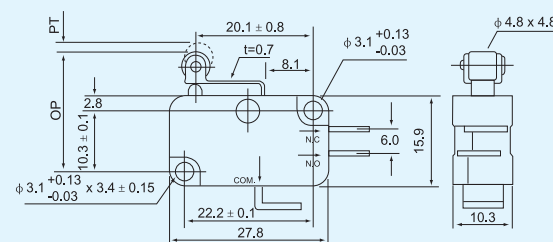

MMS105

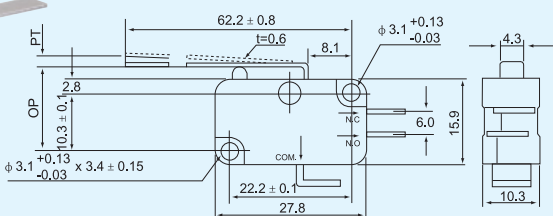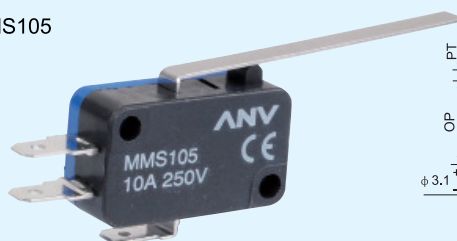

MMS106

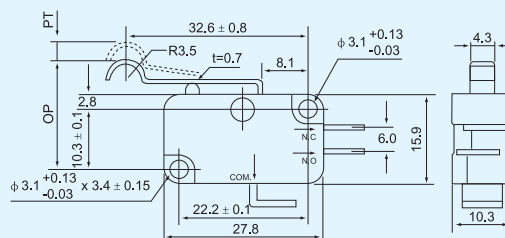

MSAQ

