


FS Foot Switches

Feature

- Metal series shell
- Plastic series shell

Contact Form




Feature

Designation	Model	Rating	Type of switch enclosed & contact arrangement	Cable type / length	Contact	Action force	Material of Rind
Standard type Momentary Action	FS-101	10A 250VAC	Micro-switch Momentary	0.75mm ² ,3C/0.5 meter(米),1 meter(米)~3 meter(米)	1A1B	1.2kg	Plastic
	FS-102	15A 250VAC	MS-1704	0.75mm ² ,3C/1 meter(米),1.5 meter(米)~2 meter(米)	1A1B	1.1kg	
	FS-103	15A 250VAC	Micro-switch Momentary	0.75mm ² ,3C/0.5 meter(米),1 meter(米)~3 meter(米)	2A2B	1.2kg	Aluminum Cast
	FS-104	15A 250VAC	MS-1704x2	0.75mm ² ,3C/1 meter(米),1 meter(米)~3 meter(米)	2A2B	1.1kg	
Standard type Alternate action	FS-105	6A 250VAC	Imported alternative switch	0.75mm ² ,2C/1 meter(米),1 meter(米)~2 meter(米)	PUSH ON PUSH OFF	2kg	Plastic
	FS-106	6A 250VAC	Imported Micro-switch	0.75mm ² ,3C/1 meter(米)	PUSH 1A PUSH 1B	1.5kg	
Mini foot switch	FS-201	10A 250VAC	Micro-switch Momentary	0.5mm ² ,3C/1 meter(米)~3 meter(米)	1A1B	0.7kg	Plastic
Mini foot switch Front end push	FS-202	10A 250VAC			1A1B	0.7kg	
	FS-01	10A 250VAC			1A1B	0.7kg	
	FS-1,FS-2	10A 250VAC			1A1B	0.9kg	Iron
Protective guard foot switch	FS-302	15A 250VAC	MS-1704	Accessory: Cable gland (without cable)	1A1B	3.2kg	Aluminum Cast
	FS-305	6A 250VAC	Imported alternative switch		PUSH ON PUSH OFF	3.1kg	
	FS-306	6A 250VAC	Imported Micro-switch		PUSH 1A PUSH 1B	3.5kg	
Full Shield	FS-502	15A250VAC	MS-1704		1A1B	3.2kg	
	FS-602	15A250VAC	MS-1704x2		2A2B	3.2kg	
Large type	FS-402	15A250VAC	MS-1704		2A2B	3.2kg	
	FS-702	15A250VAC	MS-1704		1A1B	3.2kg	
	FS-802	15A 250VAC	MS-1704		2A2B	3.2kg	


NOTES: 1, Add "R" for waterproof, available in FS3 & FS4.

Appearance and Dimension


FS-201

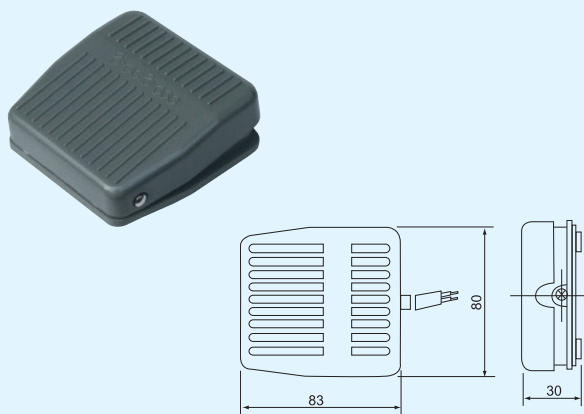


FS-01

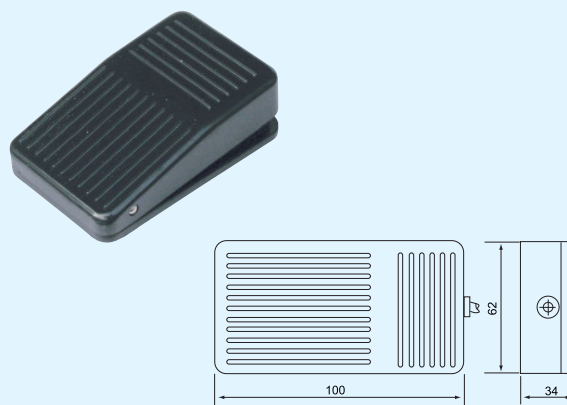


FS-101 102 103 104 105 106

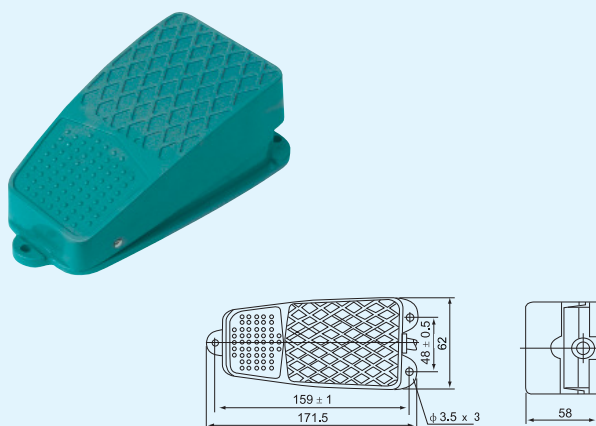


FS-1

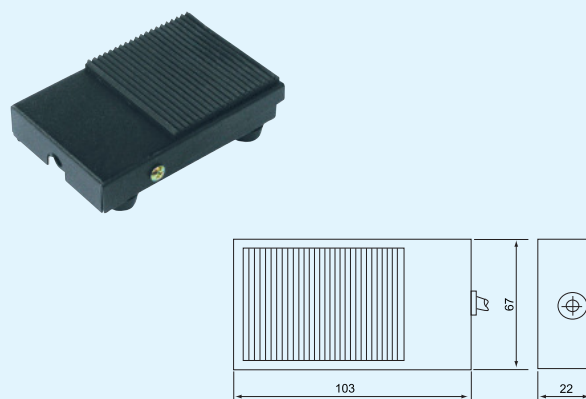


FS-2

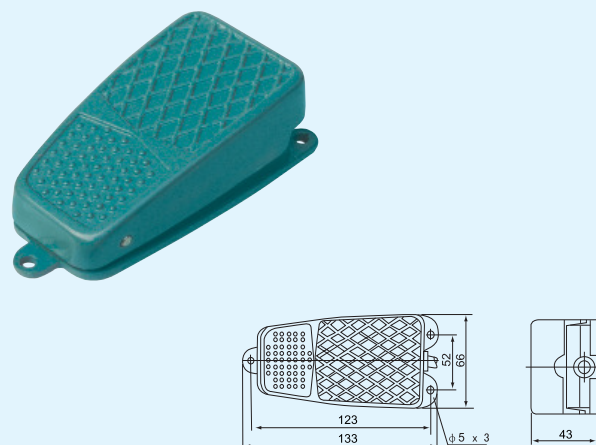


FS-302

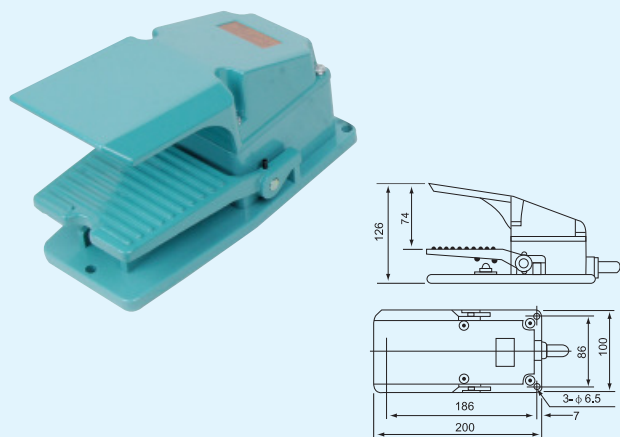


FS-402

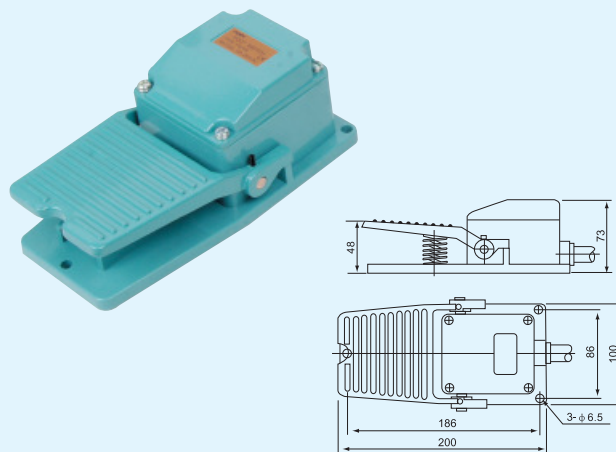


FS-502

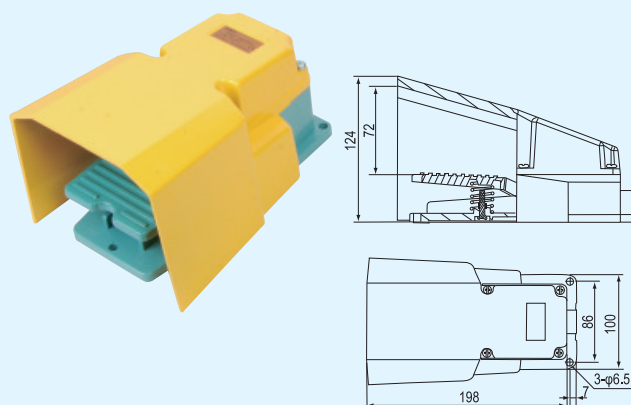

FS-602

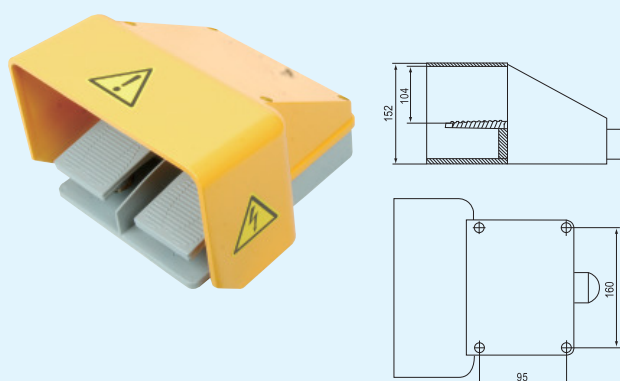

FS-702

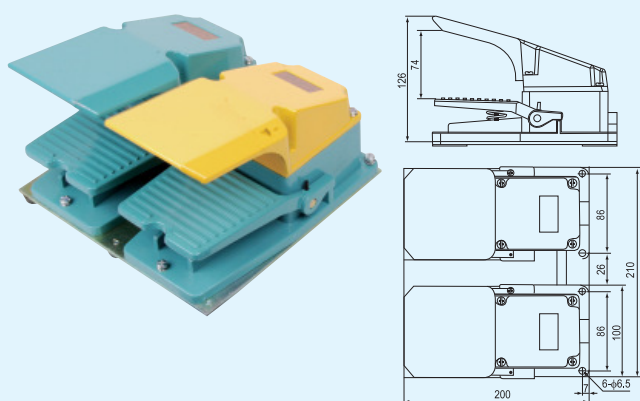

FS-802

