




- 4 digits display with 7 segment LED display
- Offered in a wide range of AC/DC 12~60V or AC100~240V
- Protection against power surge and high frequency interference
- Timing mode count UP or count DOWN(Y) option by user
- Memory function available (M)


SPECIFICATIONS

MODEL		AH6T-C
DIMENSIONS(mm)		72H × 72W × 91D
RATED VOLTAGE		12 ~ 60VDC/AC 50/60Hz 100 ~ 240VAC 50/60Hz
OPERATING VOLTAGE		85 ~ 110% of rated voltage
FULL TIME RANGE		SEC: 99.99, 999.9, 9999 MIN: 99.59, 999.9, 9999 H R: 99.59, 999.9, 9999
RESET METHOD		Power reset, External reset
RESET TIME		Power reset : 0.3 sec External reset : 0.02 sec
CONTROL OUTPUT		9+8 Gate 9+11 Reset
FUNCTIONS		Can order Count Down (Y), Memory function(M)
L I F E	MECHANICAL	---
	ELECTRICAL	---
CONSUMED POWER		Max. 2VA
AMBIENT TEMPERATURE		-10°C ~ + 55°C
AMBIENT HUMIDITY		45 ~ 85%RH
WEIGHT		Approx. 165g

CONNECTION DIAGRAMS & TIMING CHARTS

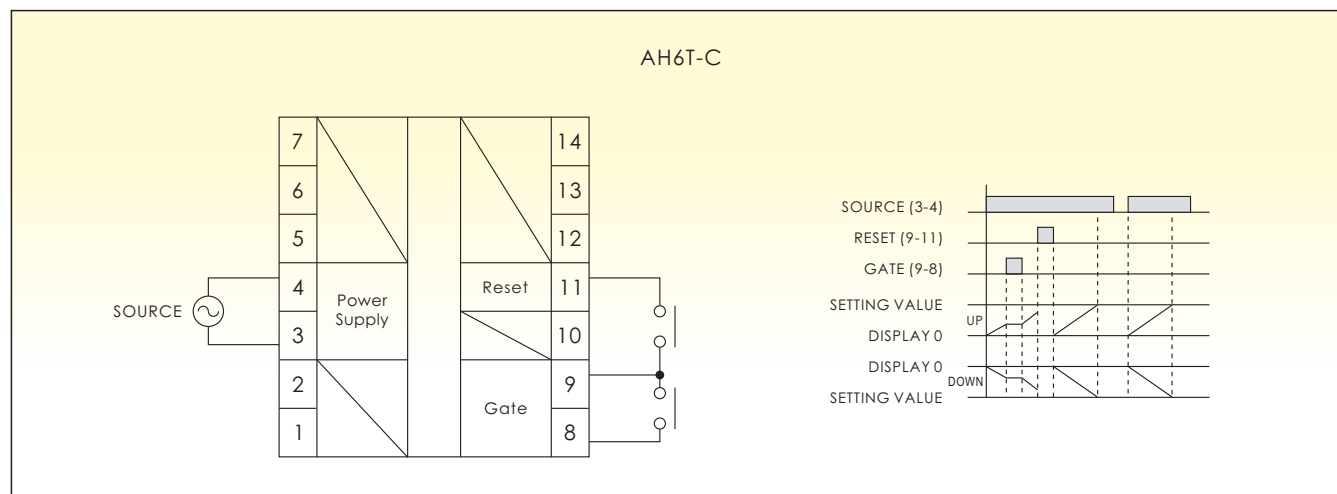

DIMENSIONS

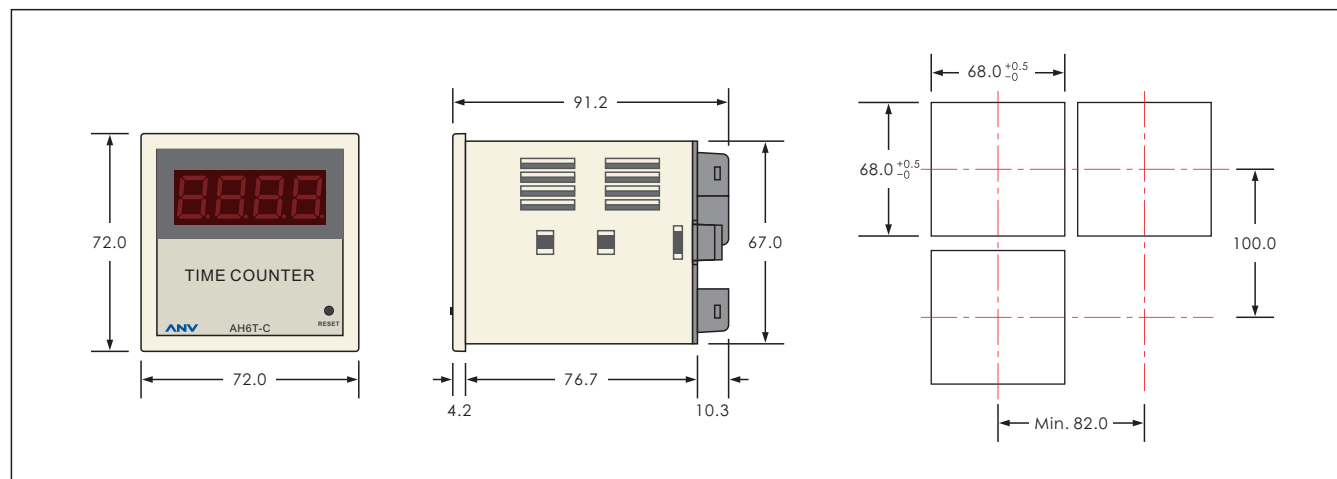

ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
Tel :+886 7 359 5833 Fax :+886 7 359 5822
E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
New Taipei City, Taiwan
Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
Tel :+886 6 216 0988 Fax :+886 6 216 0388
E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
Shatin, N.T., Hong Kong
Tel :+852 2690 2588 Fax :+852 2690 2511
E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
E-Mail : anv@anv.com.my