


**G4Q-C**

**G4Q-CS**

**G4Q-3**


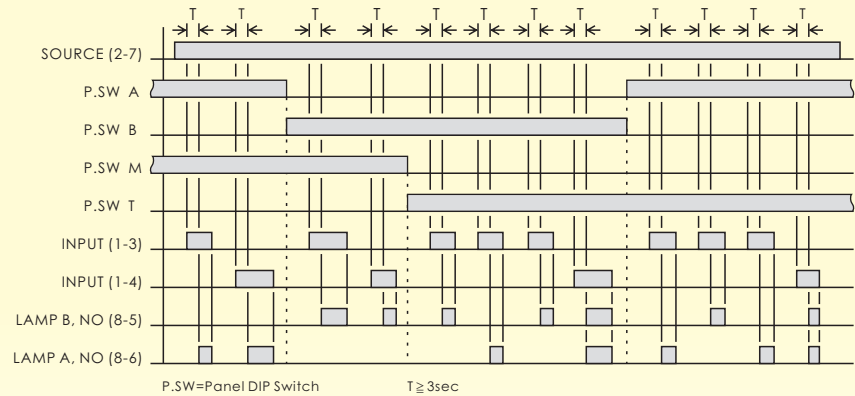

- Can set dual motor automatic alternate operation (Panel switch T) or any of the motors running alone (Panel switch M)
- G4Q-C has 3 seconds delay detection of input signal
- G4Q-C and G4Q-CS are dual input signals, Input is 1+3 pin and 1+4 pin
- G4Q-3 is applied to three motors alternately, Signal input is 1+3 pin

## SPECIFICATIONS



| MODEL               |            | G4Q-C                                                                 | G4Q-CS                 | G4Q-3                               |
|---------------------|------------|-----------------------------------------------------------------------|------------------------|-------------------------------------|
| RATED VOLTAGE       |            | DC(V): 12, 24<br>AC(V): 12, 24, 110, 220, 240V, 380, 415, 440 50/60Hz |                        |                                     |
| INDICATOR OPERATING |            | A-B Two indicator lamp                                                |                        | A-B-C Three indicator lamp          |
| INPUT DETECT DELAY  |            | $\geq 3 \text{ sec}$                                                  | $\geq 0.2 \text{ sec}$ | $\geq 1 \text{ sec}$                |
| OUTPUT CONTACT      |            | 1a 1a , 5A 250VAC Resistive Load                                      |                        | 1a 1a 1a , 5A 250VAC Resistive Load |
| LIFE                | MECHANICAL | $10^5 \text{ times}$                                                  |                        |                                     |
|                     | ELECTRICAL | $5 \times 10^6 \text{ times}$                                         |                        |                                     |
| SETTING ERROR       |            | ---                                                                   |                        |                                     |
| RESET TIME          |            | 0.3 sec max                                                           |                        |                                     |
| CONSUMED POWER      |            | 3VA                                                                   |                        |                                     |
| AMBIENT TEMPERATURE |            | $-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$                        |                        |                                     |
| AMBIENT HUMIDITY    |            | 45~85%RH                                                              |                        |                                     |
| WEIGHT              |            | Approx. 185g                                                          |                        | Approx. 195g                        |

## CONNECTION DIAGRAMS & TIMING CHARTS



G4Q-C



G4Q-CS

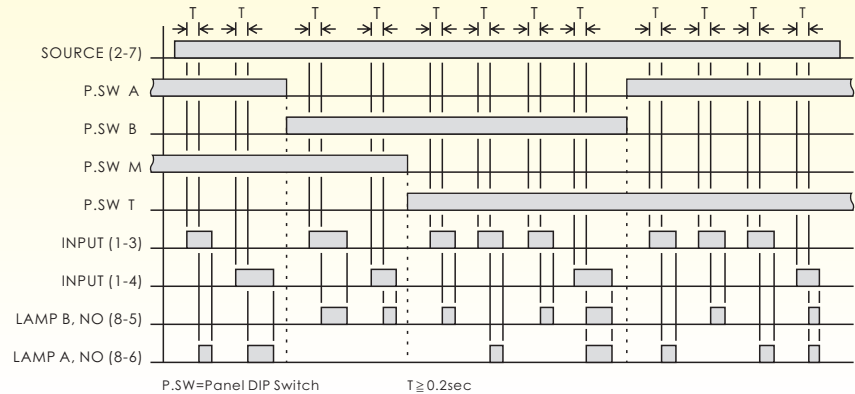


G4Q-3

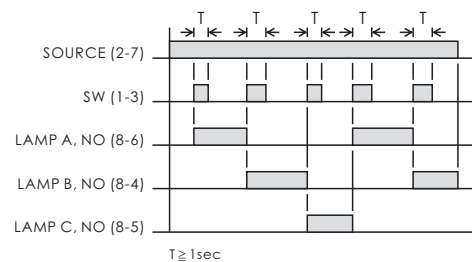

## DIMENSIONS

Surface Mounting ( N Type ) : Using 8PFA Socket

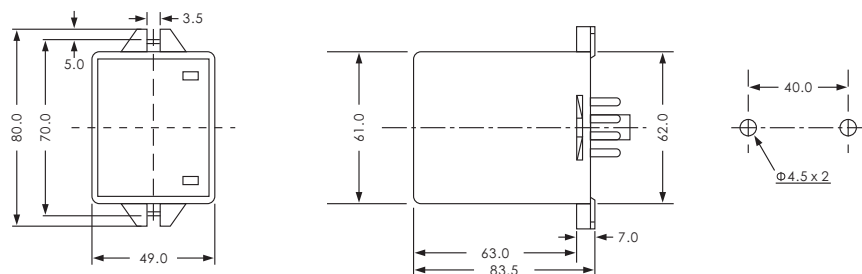

ANV ELECTRIC CO., LTD.

### Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan  
Tel : +886 7 359 5833 Fax : +886 7 359 5822  
E-Mail : anv@anv.com.tw

### Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,  
New Taipei City, Taiwan  
Tel : +886 2 2296 3133 Fax : +886 2 2296 3233  
E-Mail : taipei@anv.com.tw

### Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan  
Tel : +886 6 216 0988 Fax : +886 6 216 0388  
E-Mail : tainan@anv.com.tw

### ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,  
Shatin, N.T., Hong Kong  
Tel : +852 2690 2588 Fax : +852 2690 2511  
E-Mail : anv@anv.com.hk

### Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan  
Tel : +886 4 2320 9930 Fax : +886 4 2320 9960  
E-Mail : taichung@anv.com.tw

### ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,  
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia  
Tel : +60 3 7980 3328 Fax : +60 3 7980 3779  
E-Mail : anv@anv.com.my