

TRF




- Compact size with fixed delay time
- Off delay time from 50ms to 1sec
- 2C(DPDT) output contacts

SPECIFICATIONS


FULL TIME RANGE		50ms, 100ms, 150ms, 200ms 300ms, 400ms, 500ms, 1s
RATED VOLTAGE		DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440 50/60Hz
INDICATOR OPERATING		Power On Indicator
o/p C O N T A C T	MODEL	TRF
	TIME LIMIT 1C	
	TIME LIMIT 2C	5A 250VAC Resistive Load
	INSTANTANEOUS 1C	
L I F E	MECHANICAL	5×10^6 times
	ELECTRICAL	10^5 times
RESET TIME		--
CONSUMED POWER		2VA
AMBIENT TEMPERATURE		-10°C~+55°C
AMBIENT HUMIDITY		45~85%RH
WEIGHT		Approx. 130g

CONNECTION DIAGRAMS & TIMING CHARTS

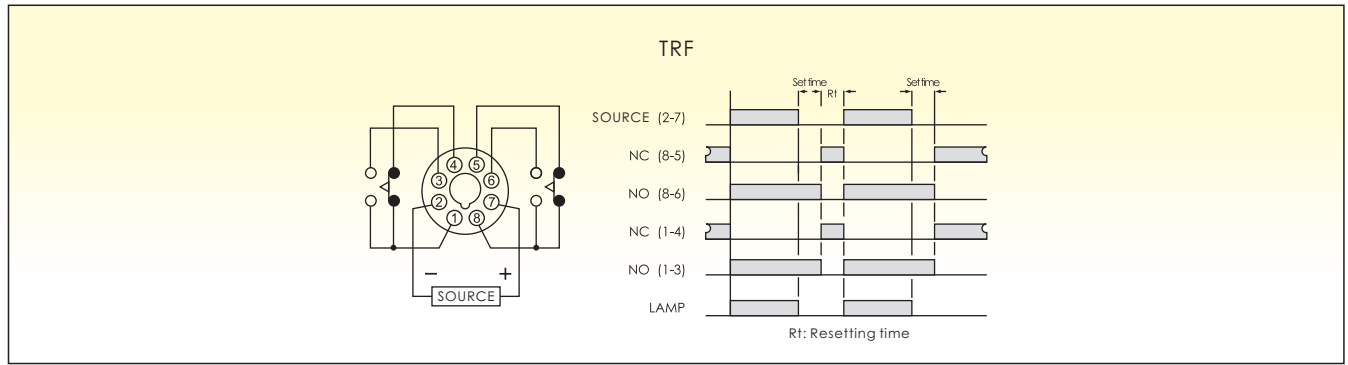

DIMENSIONS

Surface Mounting (N Type) : Using PF085A,PF085A-E Socket+SH-3 Hook

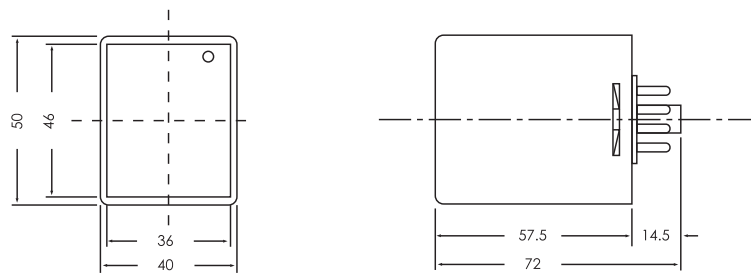

ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
Tel :+886 7 359 5833 Fax :+886 7 359 5822
E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
New Taipei City, Taiwan
Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
Tel:+886 6 216 0988 Fax:+886 6 216 0388
E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
Shatin, N.T., Hong Kong
Tel :+852 2690 2588 Fax :+852 2690 2511
E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
E-Mail : anv@anv.com.my