





- Using CMOS IC, high reliability and stability
- Large transparent knob for easy monitor and adjust
- ON-UP two indicators for relay ON and OFF
- Timer activated after touch contact release

SPECIFICATIONS

FULL TIME RANGE		10 sec	
RATED VOLTAGE		AC(V): 110, 220, 240, 380, 415, 440 50/60Hz	
INDICATOR OPERATING		ON-UP Two Indicator Lamp	
o/p C O N T A C T	MODEL	ATR-N	ATR-Y
	TIME LIMIT 1C	5A 250VAC Resistive Load	5A 250VAC Resistive Load
	TIME LIMIT 2C		
	INSTANTANEOUS 1C		
L I F E	MECHANICAL	5×10^6 times	
	ELECTRICAL	10^5 times	
RESET TIME		0.1 sec max	
CONSUMED POWER		2VA	
AMBIENT TEMPERATURE		$-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$	
AMBIENT HUMIDITY		45~85%RH	
WEIGHT		Approx. 180g	Approx. 200g


CONNECTION DIAGRAMS & TIMING CHARTS

ATR-N/ATR-Y

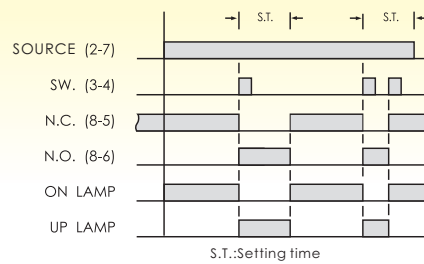


DIMENSIONS

Surface Mounting (N Type) : Using 8PFA Socket

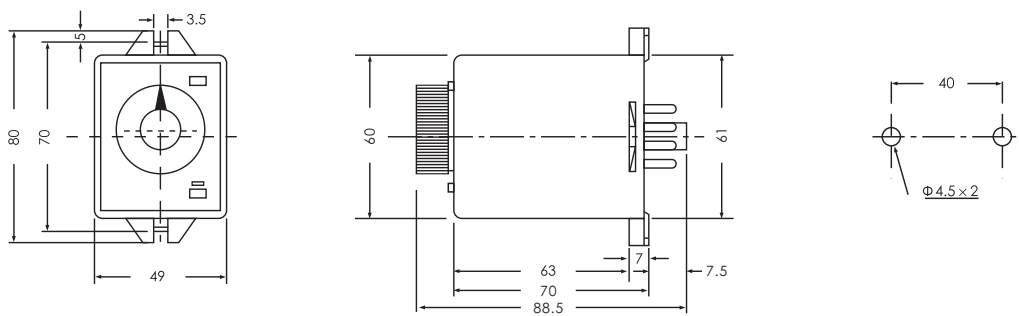

Flush Mounting (Y Type) : Using US-08 or P3G-08,P3G-08E Socket

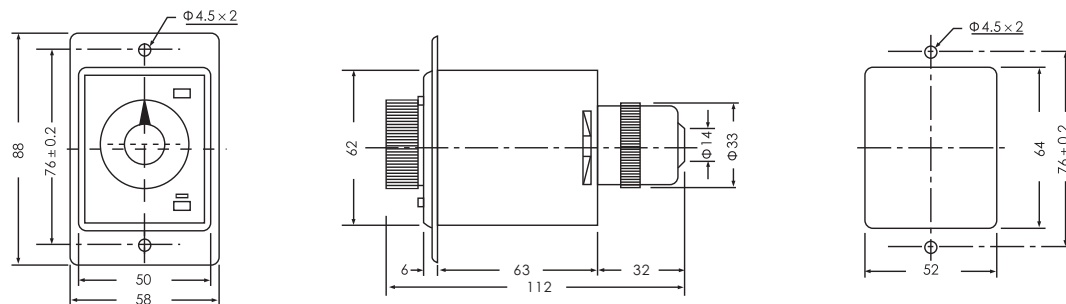

ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
Tel :+886 7 359 5833 Fax :+886 7 359 5822
E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
New Taipei City, Taiwan
Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
Tel:+886 6 216 0988 Fax:+886 6 216 0388
E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
Shatin, N.T., Hong Kong
Tel :+852 2690 2588 Fax :+852 2690 2511
E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
E-Mail : anv@anv.com.my