

DIN Size W72 × H72mm


- 4 digits display with 7 segment LED display
- Offered in a wide range voltage of AC/DC 12~60V or AC100~240V
- Contact input, proximity or photoelectric switch compatible
- Counting mode Up count or Down count select by DIP switch
- Counting speed: 30cps, 250cps, 1Kcps select by DIP switch
- Power off reset or contact (9+11) reset
- Memory function available (H5C-4M)




SPECIFICATIONS

MODEL		H5C-4																																																																																																																				
RATED VOLTAGE		12 ~ 60VDC/AC 50/60Hz 100 ~ 240VAC 50/60Hz																																																																																																																				
OPERATING VOLTAGE		85 ~ 110% of rated voltage																																																																																																																				
COUNTING RANGE		0~9999																																																																																																																				
RESET METHOD		Power reset, Self-reset, External reset																																																																																																																				
RESET TIME		0.1 sec max																																																																																																																				
CONTROL OUTPUT		Relay Contact 2C or 1A1C 9+8 Count Input 9+10 Gate 9+11 Reset 1+2 Output 12VDC 100mA																																																																																																																				
DIP SW FUNCTION		<table><tr><td>DIP開關位置</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr><tr><td>自動歸零1.0秒</td><td>OFF</td><td>ON</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>自動歸零0.5秒</td><td>ON</td><td>OFF</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>正數計數</td><td></td><td></td><td>OFF</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>倒數計數</td><td></td><td></td><td>ON</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>計數功能</td><td></td><td></td><td></td><td>OFF</td><td></td><td></td><td></td><td></td></tr><tr><td>循環計數功能</td><td></td><td></td><td></td><td>ON</td><td></td><td></td><td></td><td></td></tr><tr><td>接點2C</td><td></td><td></td><td></td><td></td><td>OFF</td><td>ON</td><td></td><td></td></tr><tr><td>接點1C+瞬時接點1C</td><td></td><td></td><td></td><td></td><td>ON</td><td>OFF</td><td></td><td></td></tr><tr><td>計數速度30CPS</td><td></td><td></td><td></td><td></td><td></td><td></td><td>ON</td><td>OFF</td></tr><tr><td>計數速度250CPS</td><td></td><td></td><td></td><td></td><td></td><td></td><td>OFF</td><td>ON</td></tr><tr><td>計數速度1KCPS</td><td></td><td></td><td></td><td></td><td></td><td></td><td>OFF</td><td>OFF</td></tr></table>									DIP開關位置	1	2	3	4	5	6	7	8	自動歸零1.0秒	OFF	ON							自動歸零0.5秒	ON	OFF							正數計數			OFF						倒數計數			ON						計數功能				OFF					循環計數功能				ON					接點2C					OFF	ON			接點1C+瞬時接點1C					ON	OFF			計數速度30CPS							ON	OFF	計數速度250CPS							OFF	ON	計數速度1KCPS							OFF	OFF
		DIP開關位置	1	2	3	4	5	6	7	8																																																																																																												
		自動歸零1.0秒	OFF	ON																																																																																																																		
		自動歸零0.5秒	ON	OFF																																																																																																																		
		正數計數			OFF																																																																																																																	
		倒數計數			ON																																																																																																																	
		計數功能				OFF																																																																																																																
		循環計數功能				ON																																																																																																																
		接點2C					OFF	ON																																																																																																														
		接點1C+瞬時接點1C					ON	OFF																																																																																																														
		計數速度30CPS							ON	OFF																																																																																																												
		計數速度250CPS							OFF	ON																																																																																																												
計數速度1KCPS							OFF	OFF																																																																																																														
L I F E	MECHANICAL	5×10 ⁶ times																																																																																																																				
	ELECTRICAL	10 ⁵ times																																																																																																																				
CONSUMED POWER		Max. 3VA																																																																																																																				
AMBIENT TEMPERATURE		-10℃ ~ + 55℃																																																																																																																				
AMBIENT HUMIDITY		45 ~ 85%RH																																																																																																																				
WEIGHT		Approx. 230g																																																																																																																				

CONNECTION DIAGRAMS & TIMING CHARTS

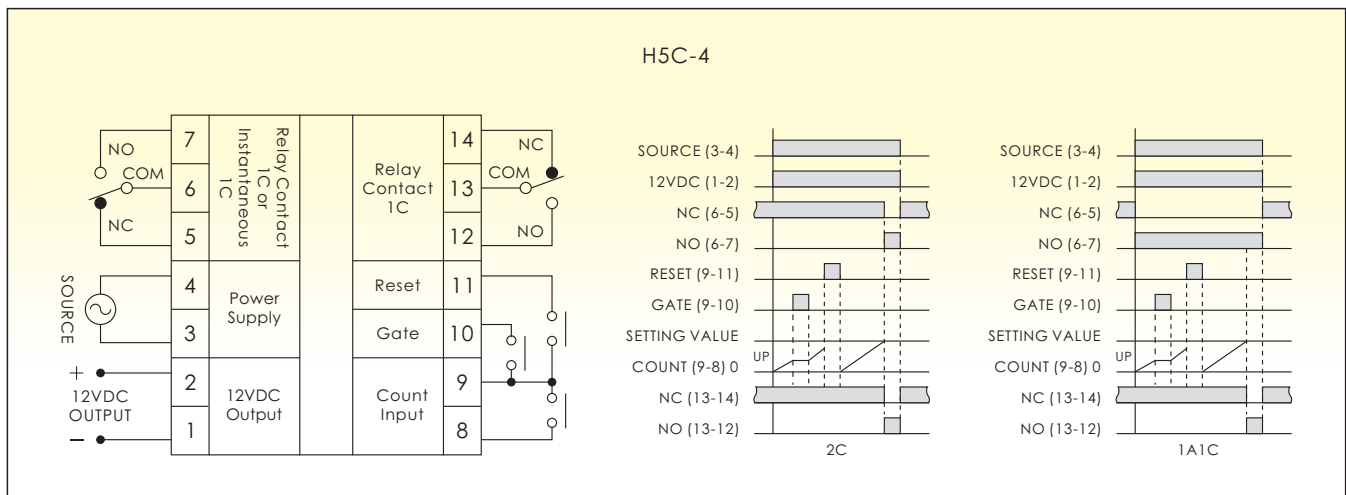

DIMENSIONS

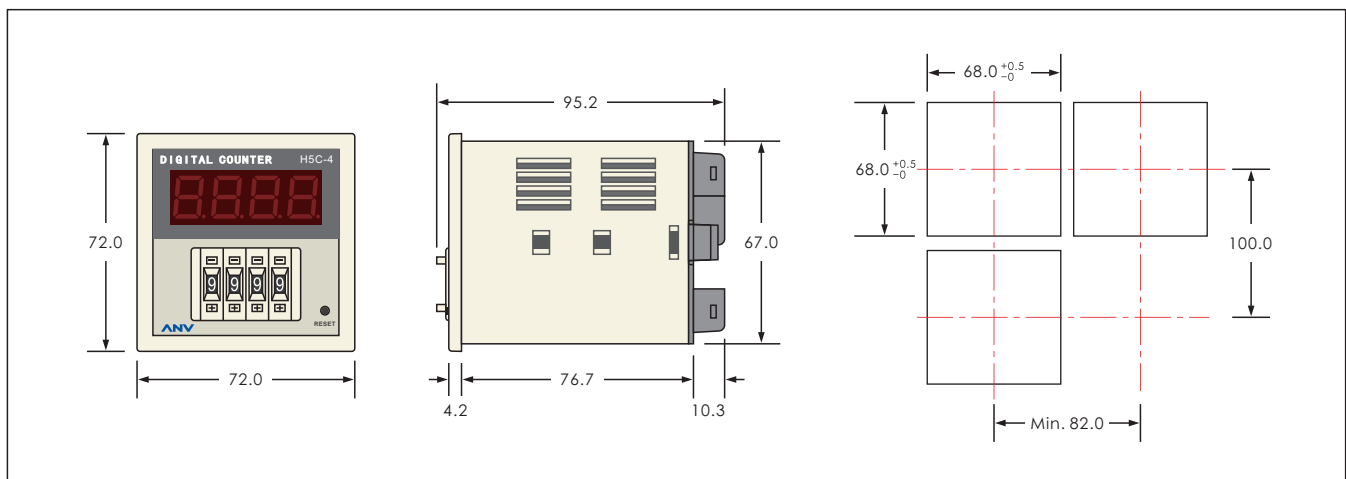

ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
Tel :+886 7 359 5833 Fax :+886 7 359 5822
E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
New Taipei City, Taiwan
Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
Tel :+886 6 216 0988 Fax :+886 6 216 0388
E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
Shatin, N.T., Hong Kong
Tel :+852 2690 2588 Fax :+852 2690 2511
E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
E-Mail : anv@anv.com.my