


AH4R, AH5R, AH6R


- 2, 3, 4 digits display with 7 segment LED display
- Offered in a wide range of AC/DC 12~60V or AC100~240V
- 8 time ranges 0.01sec~990hrs (AH4R), 0.01sec~9990hrs (AH5R), 0.01sec~99990hrs (AH6R)
- Output contact 2C delay or 1C delay with 1C instantaneous can select by pushing "MODE" switch to A or B
- Timing mode Up count or Down count (Y) option by user
- Memory function available (M)

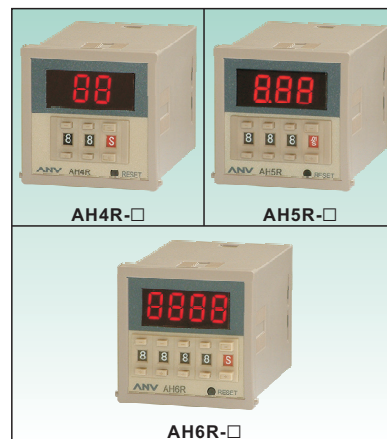

SPECIFICATIONS


MODEL		AH4R		AH5R		AH6R			
RATED VOLTAGE		12 ~ 60VDC/AC 50/60Hz 100 ~ 240VAC 50/60Hz							
OPERATING VOLTAGE		85 ~ 110% of rated voltage							
FULL TIME RANGE		SEC: 0.99, 9.9, 99 MIN: 9.9, 99 H R: 9.9, 99, 990		SEC: 9.99, 99.9, 999 MIN: 99.9, 999 H R: 99.9, 999, 9990		SEC: 99.99, 999.9, 9999 MIN: 999.9, 9999 H R: 999.9, 9999, 99990			
COUNT DOWN		AH4R-Y AH5R-Y AH6R-Y		AH4R-MY AH5R-MY AH6R-MY		AH4R-XY AH5R-XY AH6R-XY		AH4R-XMY AH5R-XMY AH6R-XMY	
SELF-RESET 0.5sec or 1.0sec		AH4R-S AH5R-S AH6R-S		AH4R-MS AH5R-MS AH6R-MS		AH4R-XS AH5R-XS AH6R-XS		AH4R-XMS AH5R-XMS AH6R-XMS	
FLICKER RELAY		AH4R-R AH5R-R AH6R-R		AH4R-MR AH5R-MR AH6R-MR		AH4R-XR AH5R-XR AH6R-XR		AH4R-XMR AH5R-XMR AH6R-XMR	
MEMORY FUNCTION		---		○		---		○	
CONTROL OUTPUT		Mode A/B 2C or 1A1C 5A 250VAC Resistive Load				Time limit 1C 5A 250VAC Resistive Load 1+4 GATE 1+3 RESET			
L I F E	MECHANICAL	5×10 ⁶ times							
	ELECTRICAL	10 ⁵ times							
RESET TIME		Power Reset : 0.3sec External Reset : 0.02sec							
CONSUMED POWER		Max. 3VA				Max. 2VA			
AMBIENT TEMPERATURE		-10℃ ~ + 55℃							
AMBIENT HUMIDITY		45 ~ 85%RH							
WEIGHT		Approx. 130g		Approx. 130g		Approx. 120g		Approx. 120g	

CONNECTION DIAGRAMS & TIMING CHARTS

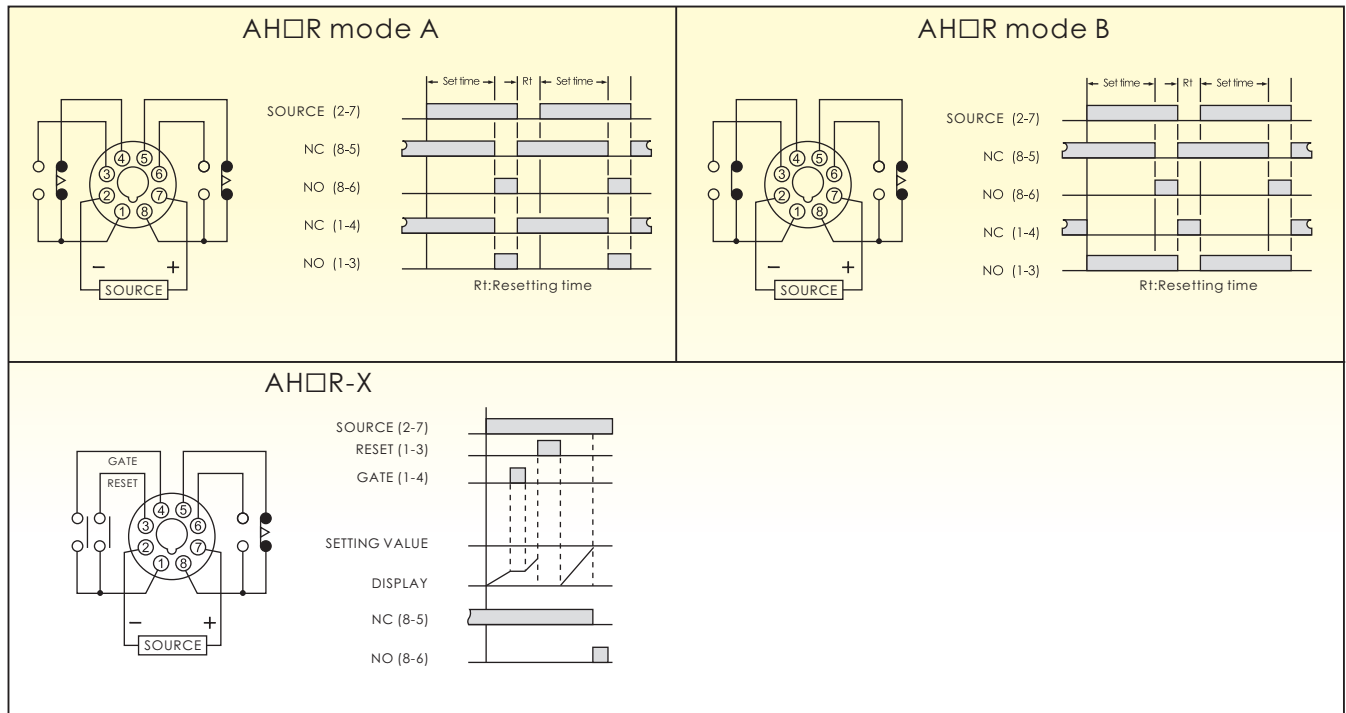


DIMENSIONS

Surface Mounting (N Type) : Using P2CF-08 or PF085A,PF085A-E Socket

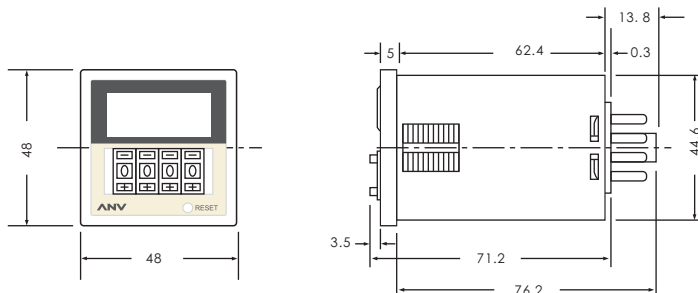

Flush Mounting (Y Type) : Using Y-50 Adapter+US-08 or P3G-08,P3G-08E Socket

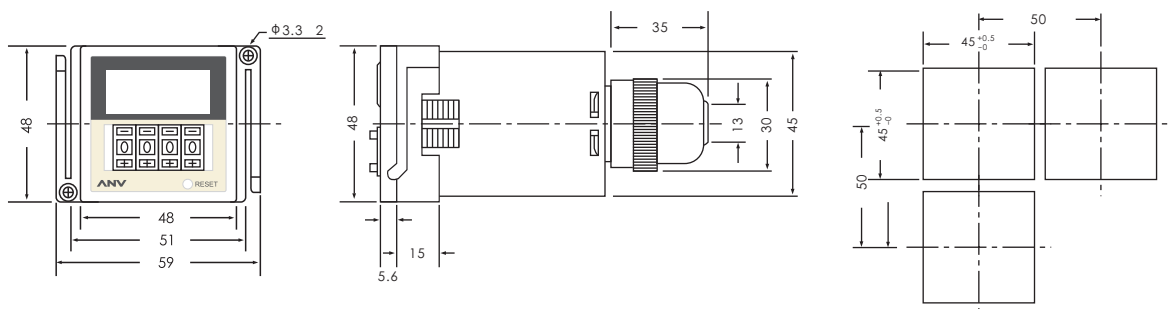

ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
Tel :+886 7 359 5833 Fax :+886 7 359 5822
E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
New Taipei City, Taiwan
Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
Tel:+886 6 216 0988 Fax:+886 6 216 0388
E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
Shatin, N.T., Hong Kong
Tel :+852 2690 2588 Fax :+852 2690 2511
E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
E-Mail : anv@anv.com.my